

LARICK

700 PROFILE SANDER SERIES

DISTRESSING
POLISHING
DENIBBING
SEALER SANDING

WOOD
METAL
PLASTIC



Model 722

2 top heads
9 inch conveyor

The **Larick 700** Series Feed Through Sander

2, 3, or 4 top heads

Optional side sanding heads can be added

Standard sanding width is 9 inches, 15 inches is optional

Brush type sanding wheels, wire brushes, or inflatable drums can be used
Larick's compact design minimizes floor space requirements

Durable and Dependable, Like all **Larick** Products




LARICK Model 732

3 top heads, 9 inch conveyor

SPECIFICATIONS

FEED RATE	4 to 40 FPM
SPINDLES	1 inch dia, 10 inch long
SPINDLE RPM	150 to 600 RPM (TOP) 150 to 900 RPM (SIDES)
VOLTAGE	208-240 1 or 3 PHASE 460 3 PHASE 575 3 PHASE
LENGTH	47 inch (2 Top Heads) add 17" per additional top head add 26" for side heads
WIDTH	33 inches with 9 inch conveyor 39 inches with 15 inch conveyor

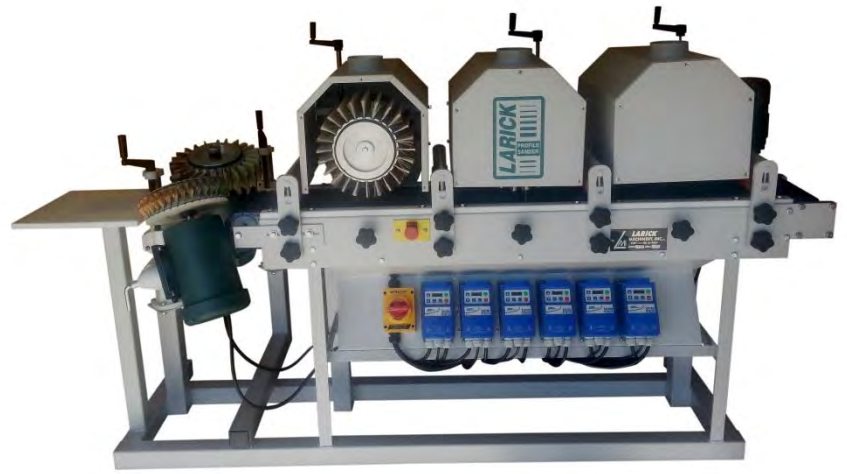

LARICK Model 732S

3 top heads, 9 inch conveyor, side heads



LARICK Model 722

2 top heads, 9 inch conveyor



9 inch conveyor and hold down roller



LARICK MACHINERY, INC.

409-A DELOZIER DR.
FORT COLLINS, CO 80524

PHONE 970-224-3061 FAX 970-224-9519

USER FRIENDLY MACHINERY

**INNOVATIVE LEADER IN
PROFILE SHAPING & SANDING**

www.larickmachinery.com info@larickmachinery.com