

RADIAL
1250/7 · 900/7
600P3S

RN
900 · 700 · 450

RADIAL ARM SAWS



WOOD be nice.

OMGA



RADIAL 1250/7 · 900/7 600P3S

RN 900 · 700 450



RADIAL 1250/7

RADIAL SERIES

Heavy-duty line with cast-iron arm. Easily interchangeable prismatic tracks applied; the cutting unit slides on eight bearings each fitted with a dust scraper. Self-centering locking devices for both arm rotation and motor angle. Aluminum fences. Optional oil-pneumatic feed of the head.

RN SERIES

OMGA radial arm saws are excellent for frame makers, furniture manufacturers, cabinet shops and sawmills.

The saw blade assembly swivels on the vertical and horizontal axis on all models.

Main angles are obtained with a self-centering locking device, while intermediate angles are set manually.

These practical and versatile radial arm saws feature replaceable tempered-steel sliding tracks, a saw carriage that slides on eight bearings, each fitted with a dust scraper to clean the tracks as the machine is being used. Many OMGA accessories are available to customize each of the radial arm saw models.



RN 900

RN 700

OPTIONAL



Roller tables with Infeed/Outfeed
RADIAL 1250/7 - RADIAL900/7

Flip stop
RADIAL 1250/7 - RADIAL900/7



Horizontal pneumatic clamp
(Right or Left)
RADIAL 1250/7 - RADIAL900/7
RADIAL 600



Pneumatic Hold-Down Clamp
RADIAL 1250/7 - RADIAL900/7
RADIAL 600P3S




Dado head guard 12" x 2-3/8"



RADIAL
900/7



RADIAL
600P3S

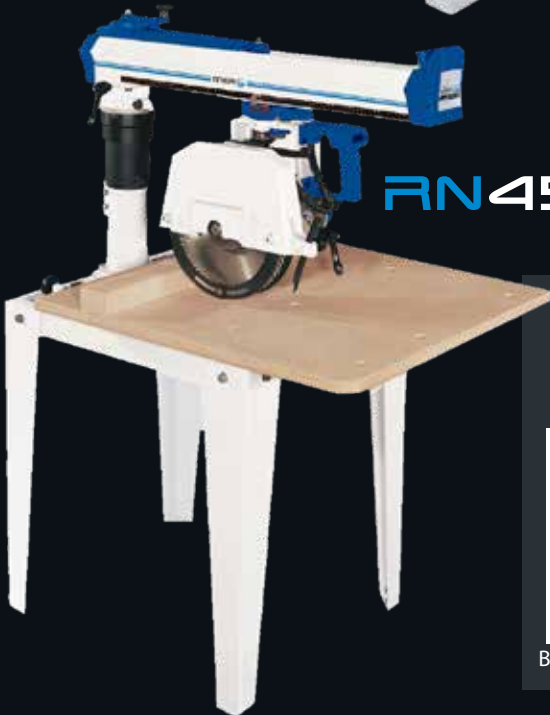

RN450

Standard Equipment for all models Radial - RN

All radials have a keyed spindle that works in conjunction with an electro magnetic braking system.



Bearings with dust scrapers



Thermal overload switch



Spring return



Dust collecting unit




Front lifting handle
RADIAL 900/7
(Standard on RADIAL 1250/7)



Oil-pneumatic feed of head
RADIAL 1250/7 - RADIAL900/7 - RADIAL 600P3S

		RADIAL 1250/7	RADIAL 900/7	RADIAL 600 P3S
Cross cut capacity	90°	49-7/32"	35-1/2"	24"
Cross cut capacity	45°	48"	24-15/16"	17"
Max. depth of cut	90°	6-7/8"	5-7/8"	4-1/2"
Max. depth of cut	45°	4-7/8"	4-3/16"	3-3/16"
Ripping capacity		59"	43-5/16"	32-5/16"
Motor power (3 phase) HP		7	7	5
Single phase		N/A	N/A	N/A
Saw bore		1"	1"	1"
Saw bore notch		8 mm x 3 mm	8 mm x 3 mm	8 mm x 3 mm
Saw diameter		20"	18"	14"
Max. capacity of spindle		2"	2"	2"
Usable spindle		1-3/4"	1-3/4"	1-3/4"
Arbor speed	RPM	3400	3400	3400
Mitre positive stops		45° - 0° - 45°	45° - 0° - 45°	45° - 0° - 45°
Bevel positive stops		0° - 45°	0° - 45°	0° - 45°
Table size		68" x 44"	47" x 39"	35" x 31"
Overall dimensions		80" x 55"	59" x 48"	35" x 46"
Crated dimensions		79"x19"x55"	63" x 19" x 43"	48" x 37" x 35"
Approx. shipping weight lbs.		1078	667	396

		RN 900	RN 700	RN 450
Cross cut capacity	90°	35-5/16"	27-1/2"	17-3/4"
Cross cut capacity	45°	24-15/16"	19-7/16"	12-1/2"
Max. depth of cut	90°	4-1/2"	4-1/2"	3-1/2"
Max. depth of cut	45°	3-3/16"	3-3/16"	2-1/2"
Ripping capacity		44-1/2"	36-5/8"	26-3/4"
Motor power (3 phase) HP		5	5	4
Single phase		2	2	2
Saw bore		1"	1"	1"
Saw bore notch		8 mm x 3 mm	8 mm x 3 mm	8 mm x 3 mm
Saw diameter		14"	14"	12"
Max. capacity of spindle		2"	2"	2"
Usable spindle		1-3/4"	1-3/4"	1-3/4"
Arbor speed	RPM	3400	3400	3400
Mitre positive stops		45° - 0° - 45°	45° - 0° - 45°	45° - 0° - 45°
Bevel positive stops		0° - 45°	0° - 45°	0° - 45°
Table size		32" x 46"	35" x 35"	27" x 21"
Overall dimensions		54" x 46"	35" x 50"	27" x 40"
Crated dimensions		63" x 20" x 43"	52" x 38" x 63"	35" x 35" x 43"
Approx. shipping weight lbs.		392	385	260

 2900204570.01

OMGA Industries, Inc.

3705 William Richardson Drive
 South Bend, IN 46628
 USA
 Tel.: +1 (574) 243-0120
 Fax: +1 (574) 243-0216
 Toll Free: 1-800-233-OMGA (6642)
 E-mail: info@omgainc.com

WWW.OMGAINC.COM

